Cranbourne Park Primary School

Contractor Occupational Health and Safety (OHS) Induction Handbook



Prepared by:	Michael Youngs
Date Prepared:	15/02/2024
Review Date:	15/02/2025

Click here to enter a date.

```
"[Recipient name]"
```

Dear [Choose an item.] "[Recipient name]",

The Department of Education and Training (the Department) has implemented an OHS Management System (OHSMS) in that requires all contractors engaged to provide maintenance, repair work, or services in [workplace] be approved prior to the commencement of any works.

Please read the attached Contractor OHS Induction Handbook and familiarise yourself with its contents. Upon arrival to the site, please report to the general office to sign in and be issued with a visitor's pass that is to be worn at all times whilst on Department premises. You will also be required to undergo a site specific OHS induction.

The following information is to be provided:

- copy of current public liability insurance certificate (Note: \$10 million minimum cover required)
- copy of current workers compensation insurance certificate (if company)¹.
- copy of trade licenses and bring original for sighting
- current Working with Children Check (where applicable)
- copy of Safe Work Method Statement /Job Safety Analysis for the high risk wrok to be undertaken or as mandated by the Department.

This information is to be returned to us by **Click here to enter a date.**

Note: If you are assessed as non-compliant you will be advised to submit further evidence.

If you any questions please do not hesitate to contact "[contact name]" on "[telephone number]" or "[email address.]"

Yours Sincerely,

_

[&]quot;[Position] "

[&]quot;[Company name]"

[&]quot;[Street address]"

[&]quot;[City, ST, ZIP code]"

¹ If the contractor is a sole trader, they will not have Workers Compensation Insurance, but may have income protection. Ensure that details are supplied to ------- School/College.

Table of Contents

Table of Contents	2
Introduction	3
Department Health, Safety and Wellbeing (HSW) Policy 4
Required conduct/behaviour	5
Access arrangements	6
Access	6
Traffic Management	Error! Bookmark not defined.
OHS Induction	7
Safe Work Method Statements (SWMS)	8
Confined Space Entry Permit	9
Site specific hazards	10
Asbestos	10
Hazardous Substances and Dangerous Goods	10
Potential to fall two metres or more	10
Hot Work	11
Cables	11
Animals / Wildlife	11
Emergency management	12
Workplace Codes	Error! Bookmark not defined.
Emergency Procedures	12
Leaving Site in an Emergency	12
Evacuation Point	12
Emergency contacts	13
First aid and amenities	14
First Aid	14
Amenities	Error! Bookmark not defined.
Hazard and Incident reporting	15
Appendix A: Emergency Evacuation Map	16

Introduction


To comply with the requirements of the Victorian Occupational Health and Safety (OHS) Act 2004 and the Victorian OHS Regulations 2017 the Department of Education and Training (the Department) has implemented an OHS Management System (OHSMS) in all Victorian Government schools.

The OHSMS requires all engaged contractors and sub-contractors to:

- · report to the general office upon arrival at site
- complete an OHS induction using the Contractor OHS Induction Checklist
- sign in/out and ensure their visitors pass is worn at all times whilst on Department premises
- provide the following information:
 - o licence numbers and/or qualification details
 - Public Liability Insurance Certificate of Currency (minimum \$10 million sum insured)
 - Workers Compensation Insurance Certificate of Currency (if not a sole trader)
 - Safe Work Method Statement (SWMS) or Job Safety Analysis (where applicable, see page 7).
- complete a Confined Space Entry Permit in consultation with the principal and/or their delegate for confined space entry.

Department Health, Safety and Wellbeing (HSW) Policy

The Department has the *Health, Safety and Wellbeing Policy*, which has been endorsed by the Department Secretary and can be seen below:

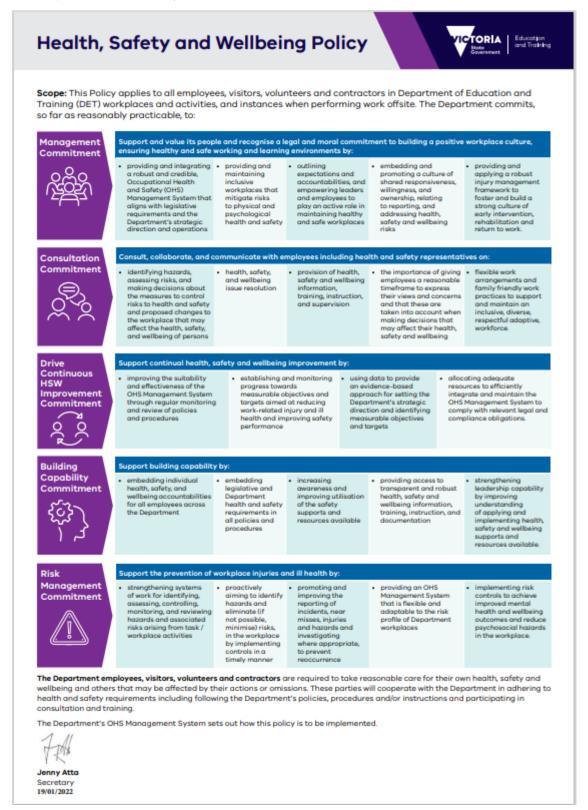

Required conduct/behaviour

All contractors are expected to abide by the workplaces code of conduct while on site. This includes:

- No smoking on school grounds or within four metres of an entrance to all Department workplaces.
- No alcohol or drugs are to be consumed on any Department premises. Any contractor under the influence will be dismissed.
- No offensive language is permitted on any Department premises.
- Noise must be kept to a minimum. If this is not practicable, then non-urgent work should be scheduled outside of school hours, where possible.
- Possessions, materials, and equipment should be secured and not be left unattended.
- Abide by the workplaces traffic management procedures.
- Entrance to other areas of Department workplaces aside from the work area is prohibited, unless otherwise agreed to.
- Remove all litter and debris from the workplace.
- Report any problems, hazards, or incidents to the principal or their delegate.
- Dress appropriately and wear the correct personal protective equipment suitable.
- No pets are permitted on Department premises.

Access arrangements

Access

All contractors must report to the general office and sign in upon arrival at the workplace. This requirement is indicated on signage located at all entrances to the school, see below:



Contractors are to restrict their movements and activities within the school to those areas and times approved/agreed to.

Traffic Management

Contractor vehicles are to enter and exit the school grounds via the following locations:

- Staff Car Park
- Basketball court (only permitted if being supervised by CPPS staff)

Designated pedestrian crossings are:

Tucker Street by the main gate.

Vehicles entering school grounds must adhere to all traffic signage. Where there is no signage, vehicles are to move at walking pace at all times. If a vehicle has limited visibility or mobility, a spotter should be used when the vehicle is in motion.

Contractors are not to operate vehicles on, or around, school grounds during designated drop off/pick up times or during break times:

• Drop off: **8:45am – 9 am**

• Recess: 11am - 11:40am

• Lunch: 1:40pm - 2:20pm

• Pick up: **3:20pm – 3:35pm**

OHS Induction

Upon arrival at the site, you will be required to complete an OHS Induction covering the site specific risks.

Contractor inductions are valid for 12 months, except where the provision of a SWMS is mandated for high risk work. In this instance, the contractor must be re-inducted (see Chapters 3 and 4 of the Contractor OHS Management Procedure).

Company Name: Contractor's Name: Brief Description of Section 1			
Brief Description of			
	Mr. I.		
Continu d	Work:		
General Induction			
		named contractor(s) have been provid	ed with followin
Department Health, S	afety and Wellbeing (H	SW) Policy	Yes 🗆
Required conduct/beh		-	Yes 🗆
High or extreme risk as identified in the OHS Risk Register related to the works to be undertaken			Yes 🗆
Security access arran	gements / Traffic Mans	gement Plan	Yes 🗆
Emergency management			Yes 🗆
First aid and amenities			Yes 🗆
	s and Dangerous Goo	ds stored on site	Yes 🗆
Hazard and incident r		or stored on site	Yes 🗆 N/A 🗆
		ision 5 Audit Penort	Yes 🗆 N/A 🗆
Current Asbestos Management Plan and Division 5 Audit Report Introduction to Asbestos Coordinator			Yes 🗆 N/A 🗆
Confined Space Entry	Permit		Yes 🗆 N/A 🗆
. ,	ovided by the Contrac	tor	
Licence details			Yes 🗆 N/A 🗆
(minimum ten millio	n sum insured)	ility Insurance Certificate of Currency	Yes 🗆 N/A 🗆
		Insurance Certificate of Currency	Yes 🗆 N/A 🗆
Current Working with Safe Work Method St			Yes N/A
Personal Protective E	/		Yes 🗆 N/A 🗆
Sign off	Name	Signature	Date
		e information (as indicated above) and	
I mave been provided	listed in the Safe Worl	Method Statement (or equivalent).	T
the safety instructions Contractor:	ontractor with the releva	ant Department and site-specific informa	ation related to
the safety instructions Contractor: I have provided the co the works to be condu	ontractor with the releva	ant Department and site-specific informa	ation related to
the safety instructions Contractor:	ontractor with the releva	ant Department and site-specific informa	ation related to

Safe Work Method Statements (SWMS)

A contractor is expected to supply a *Safe Work Method Statement* (SWMS) or equivalent template, prior to the commencement of works, based on the level of risk or **as mandated by the Department** for the following high risk work:

- confined space entry
- demolition works
- hazardous manual handling
- hot works (e.g., welding)
- powered mobile plant (e.g., forklift)
- removal or disturbance of asbestos
- temporary supports for structural alterations
- tilt-up or precast concrete.
- trenches or shafts deeper than one and half metres
- use of explosives
- use of Hazardous Substances and Dangerous Goods
- working at height (two metres or more)
- works in tunnels
- Work that is in, on or nearby:
 - artificial temperature extremes (e.g., work in an operating cool room or freezer)
 - o chemical, fuel or refrigerant lines
 - o contaminated or flammable atmospheres
 - electrical installations or services
 - pressurised gas distribution mains or piping
 - o roads
 - telecommunications towers
 - water/liquids that pose a drowning risk

If the proposed work requires a SWMS, the works cannot proceed until the principal and/or their delegate has reviewed and signed the SWMS, to verify it has been sighted. A new SWMS will be required if scope of works change.

Confined Space Entry Permit

For works to be completed in a confined space, a contractor is to obtain and complete a Confined Space Entry Permit in consultation with the principal or their delegate as per the following procedure:

- report to the general office to sign in upon arrival
- ensure that your SWMS is complete
- obtain and complete a permit to work in consultation with the principal or their delegate
- prominently display the permit to work
- return the permit to work to the office, to be signed off, at the completion of task or end of the day
- if the task is not completed, repeat the process on successive days until the task is complete
- if the scope of works changes the permit to work must be re-issued.

Site specific hazards

Asbestos

All schools are expected to have a Schools Asbestos Management Plan in the event of the discovery of suspected asbestos containing material (ACM) or the accidental disturbance of existing ACM.

If ACM has been identified in the school, the following process must be followed prior to the commencement of works:

- Asbestos Register MUST be checked at the time of sign-in when the proposed work involves drilling, scraping, sanding, sawing or any other destructive process.
- if work is to be carried out in the vicinity of Asbestos Containing Material the Asbestos Coordinator (Michael Youngs – 5996 1142) must be consulted prior to the commencement of work.
- asbestos containing material may only be removed by a licensed removalist.

Hazardous Substances and Dangerous Goods

If transporting hazardous substances or dangerous goods onto site, the principal or their delegate must be informed. You must complete a Safe Work Method Statement or equivalent to outline the controls methods you will use to ensure that the risks of the hazardous substances and/or dangerous goods are managed.

Such controls may include, but are not limited to:

- the provision of Safety Data Sheets (SDS)
- correct labelling of containers
- correct storing and handling of containers
- correct disposal of any waste
- provision of personal protective equipment (PPE).

Potential to fall two metres or more

Where there is the potential to fall two metres or more including:

- work at a height of two metres or above (measured from the ground to foot position on ladder rung/work platform) or
- undertake excavation work (depth of one and a half metres or more)

A Safe Work Method Statement or equivalent e.g., Job Safety Analysis must be supplied to the school demonstrating how you will manage the risks.

Hot Work

If a hot work task is to be undertaken (e.g., welding, burning, soldering, grinding) a Safe Work Method Statement or equivalent, must be supplied to the school, demonstrating how you will manage the risks.

Cables

Various underground service cables are present throughout the site. Adequate controls must be implemented and discussed with the principal and/or their delegate or other Department site contact prior to performing works that could disrupt Department services.

Prior to conducting works, please contact 'Dial Before You Dig' on ph. 1100 (toll Free) between 8am and 5pm. For further information access the <u>Dial Before you Dig Vic/Tas</u> Service Guidelines.

You can also call Energy Safe Victoria on (03) 9203 9700 or 1800 652 563 during normal business hours, or email ESV at info@energysafe.vic.gov.au.

Animals / Wildlife

There is the potential to come into contact with domestic animals and wildlife while on this site. Should this occur, you must:

- do not approach any domestic animals (e.g., dogs) or dangerous wildlife
- report the sighting of any domestic animals or dangerous wildlife to the principal or their delegate.
- do not reach into any holes or gaps in the buildings without first checking to see if it is safe.

Emergency management

Emergency Procedures

On hearing the alarm:

- switch off all equipment
- · proceed to the advised assembly area
- report to one of the wardens
- do not leave the assembly area until advised.

Leaving Site in an Emergency

All contractors are required to proceed to the evacuation point and remain there until given clearance to leave by the Incident Controller or principal.

Evacuation Point

The evacuation point is located at the oval; refer to Evacuation Map (Appendix A).

Emergency contacts

School contacts		
Principal	Ross Carlson	0419524409
Assistant Principal	Michael Youngs	0430032112
Asbestos Co-ordinator	Michael Youngs	59961142
Business Manager	Ben Carr	59961142
Office Manager	Chris Petersen	59961142
General Office Number	Marcela Sarnyai	59961142

School after hours contacts

Workplace Manager: Ross Carlson 0419524409
Assistant Principal: Michael Youngs 0430032112

Emergency contacts

 Police:
 000

 Fire:
 000

 Ambulance:
 000

 Poisons:
 13 11 26

Emergency contacts

Police: 000

Fire: 000

Ambulance: 000

Poisons: 13 11 26

First aid and amenities

First Aid

In the event of an injury:

- 1. if the injury is not serious, report or escort the injured party to the administration office for assistance
- 2. if the injury is serious ring 000, do not wait for first aid officer
- 3. stay with injured party. Send someone else to find the first aid officer or workplace manager
- 4. if no one else is available, ring the school number and inform the office that someone is injured at your location
- 5. if trained, apply first aid to the injured party
- 6. once incident is over, fill in an incident report at the office.

Hazard and Incident reporting

Any hazard or incident which poses a risk to the safety of a student, parent, visitor, contractor or employee must be reported.

- Call 000 immediately to report any incident threatening life or property. This number will connect you to the following emergency services:
 - o police for crime, injury that may not be accidental, or assault
 - o ambulance for injury and medical assistance
 - fire brigade for fires, gas leaks and incidents involving hazardous and dangerous materials.
- Notify the administration office in person, or, if unable or unsafe to do so, notify someone via the emergency contact list (page 11).
- Principal or their delegate is to report the incident on eduSafe Plus.

Appendix A: Emergency Evacuation Map

